




# PRODUCT SPECIFICATION: KMT-1227PK

**SKUTT**  
CERAMIC PRODUCTS



DIMENSIONS

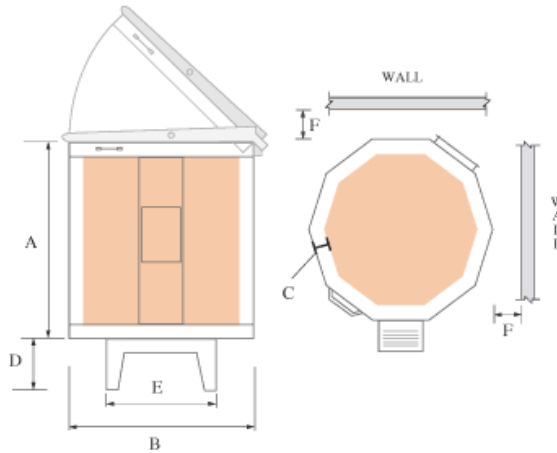

**SPECIFICATIONS & DIMENSIONS**

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KMT-1227PK	3	208	10	2350	27	28.00	9.9	33	34	3	8	24	18	46.7	14300	6	Direct Wire	24540

**OPTIONAL ACCESORIES**

1227 ROLLING KILN STAND	Optional
ENVIROVENT 2	Optional
KILNLINK BOX PACKAGE	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional

**CONTROLLER**

Thermocouple: Type K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 1 AMP



Print this page